



# Bose SoundLink Mini II Speaker Replacement

This guide will show you how to remove and replace the speakers in the Bose SoundLink Mini II.

Written By: Tyler Roessler



## INTRODUCTION

In this guide we will be disassembling the whole device to replace the speaker. It is very important to keep track of all the components and screws while following these instructions.

---



### TOOLS:

- [64 Bit Driver Kit](#) (1)
  - [T9 Torx Screwdriver](#) (1)
  - [Metal Spudger](#) (1)
-

## Step 1 — Battery



- Flip the speaker over onto its back.

## Step 2



- Gently remove the rubber base from speaker by pulling around the edges.





## Step 3



- Remove the four 6mm T9 Torx bit screws from the corners of the battery.

## Step 4

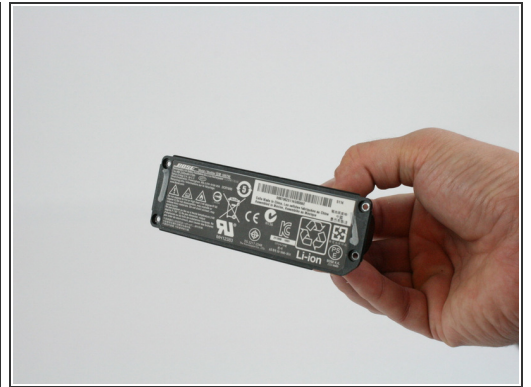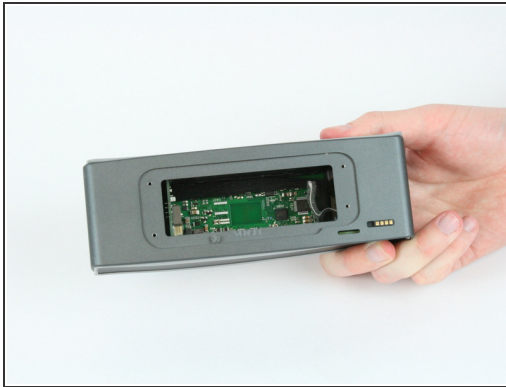

- Gently remove the battery from the speaker.

## Step 5 — Speaker



- Removing the device front grille with a metal spudger, starting in one corner and working around the border.

⚠ The grille is easily bent and deformed.

## Step 6



- Remove the rear grille with a metal spudger, starting in one corner and working around the border.

⚠ The grille is easily bent and deformed.




## Step 7



- Remove the eight 9mm T9 screws.

## Step 8

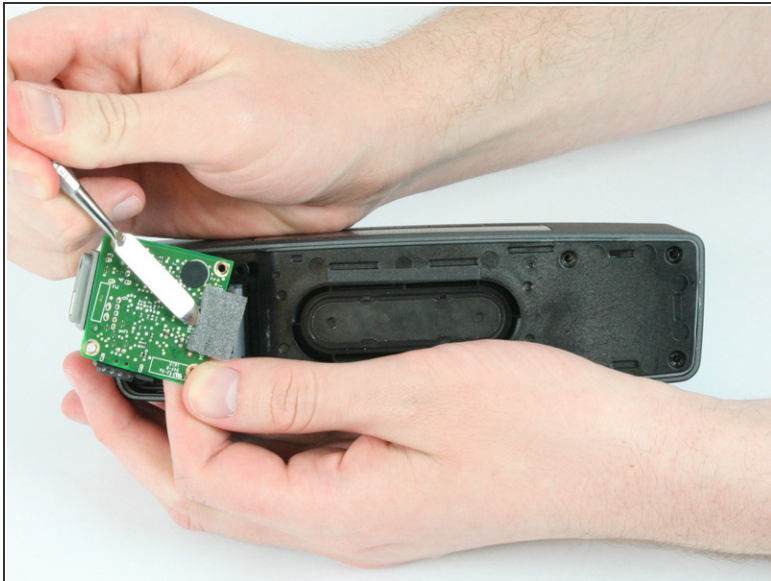

- Use the metal spudger to release ribbon cable retainer.
- Detach the ribbon cable from the circuit board by sliding out from board connector.

## Step 9



- Pull the ribbon cable through the rear case wall.

## Step 10





- Remove the top circuit board by lifting up.
- Disconnect the wired pair from board upon removal.

⚠ There is a non latched connector connecting the top board to side board. Be careful to not damage this connector during the removal process.



## Step 11

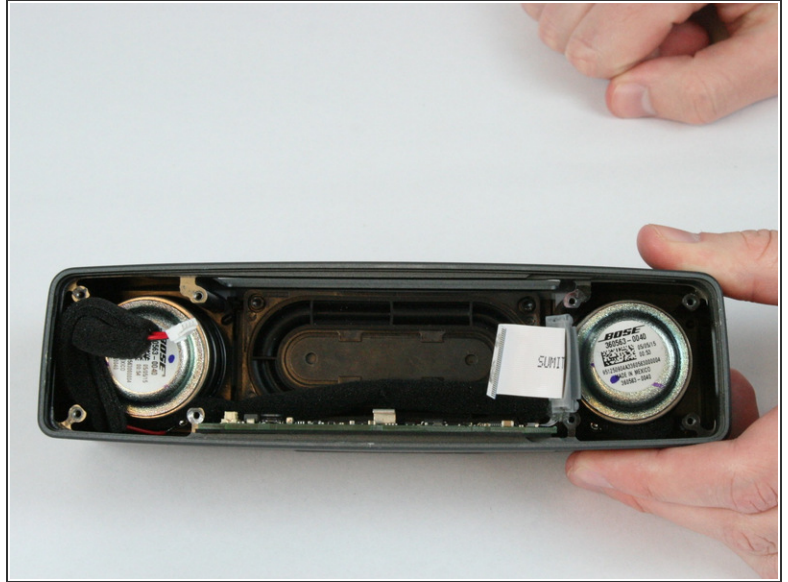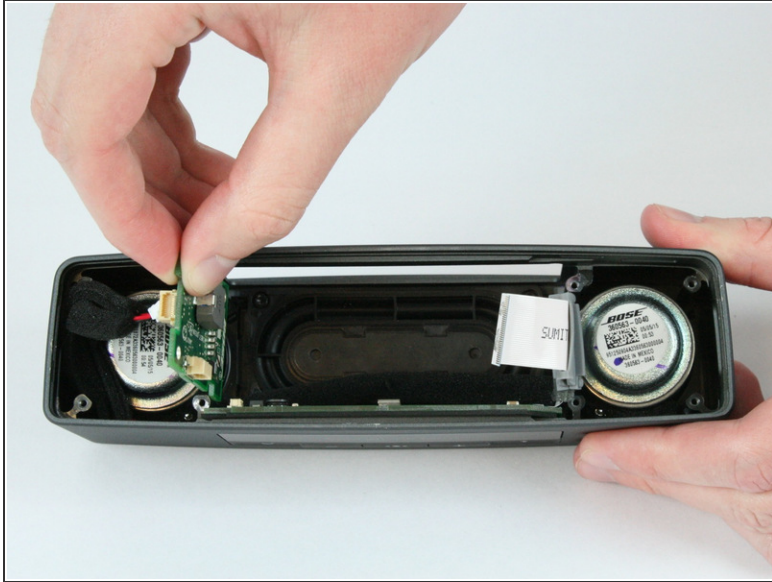

- Remove the side board by sliding outward from the device.

⚠ There is a non latched connector connecting the side board to button board. Be careful to not damage this connector during the removal process.

## Step 12



- Remove the eight 9mm T9 Torx screws from the front of the device.




## Step 13



- Use the metal spudger to remove the front case panel.

## Step 14

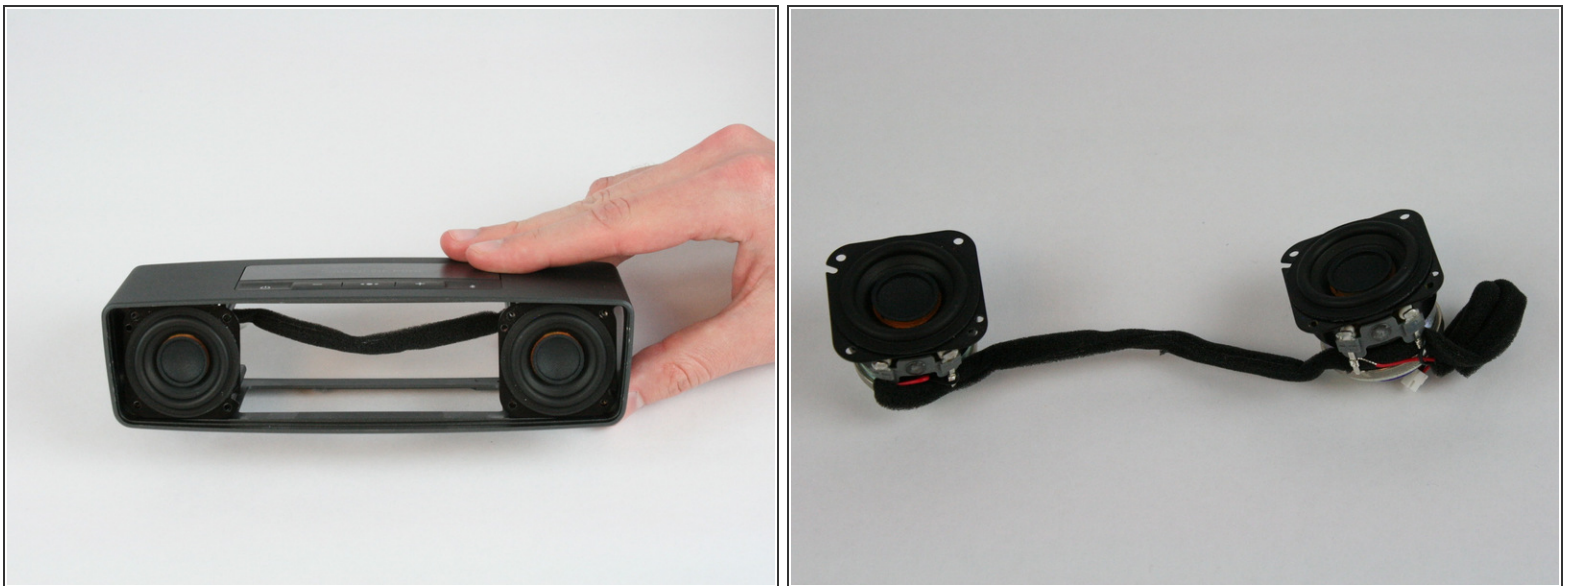

- Remove the speakers from the case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-07 05:13:58 AM.